


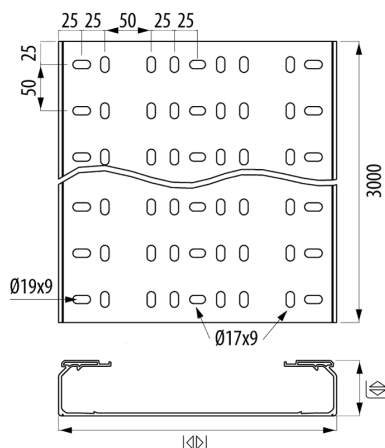

Description

Perforated tray made of insulating material. Of 60 mm height, Width 200 mm. Grey RAL 7035 colour for the support, protection and conduction of cables. Maximum functionality and adaptation to different spaces and environments. Excellent performance in corrosive environments, weathering and exposure to UV radiation. Wide range of accessories with multiple applications. Tray with lid (insulating protective channel) according to EN 50085. Complies with REACH and ROHS III directives. Free of dangerous substances.

Advantages

Excelente comportamiento en ambientes corrosivos, intemperie y exposición a la radiación UV.

Grado de protección IP 2X y Grado de Impacto 20 J (EN 61537) y IK10 (EN50085)

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Material aislante, seguridad eléctrica y reducción de costes en mantenimiento.

No propagador de la llama. Reacción al fuego, grado V0 y clasificación M1

Applications

Solutions



Metatray perforated tray (Ref: 82004162)

Product data			
Colour	Grey RAL 7035	Impact Strength (J)	6 J
Flange (mm)	60	Section (mm2)	9692
Width (mm)	200	IP	IP23
Length (m)	3	Working temperature range (°C)	-20 / 60 °C
kg/u	1.596	Fire resistance	GRADO UL94: V0
u	12	UV Behaviour	ULf1 Resistant
Material	PVC		

Protection System
CU - Copper electroplated
PG - Pregalvanised
EZ - Electrogalvanised
BC - Electrogalvanised Bichromate
BK8 - High Resistance Coating
GC - Hot Dip Galvanising
INOX - Stainless Steel
PT - Polyester Paint
AL - Aluminum
LN - Brass or Nickel-plated brass

Insulating materials
PC+ABS - Halogen Free Polycarbonate + ABS
PVC - Polyvinyl Chloride
PP - Halogen Free Polypropylene
PA6 - Halogen Free Polyamide 6
PA12 - Halogen Free Polyamide 12
PU - Polyurethane
PE - Polyethylene
NBR - NBR rubber
PET - Thermoplastic Polyester
TPV - Thermoplastic



Product applications

