


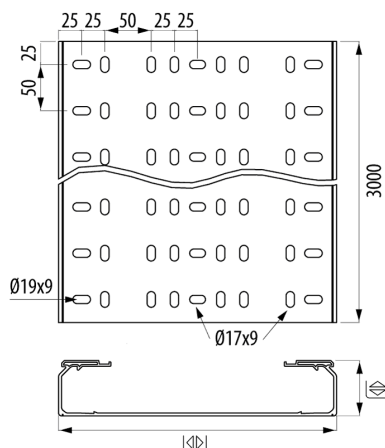

## Description

Perforated tray made of insulating material. Of 60 mm height, Width 300 mm. Grey RAL 7035 colour for the support, protection and conduction of cables. Maximum functionality and adaptation to different spaces and environments. Excellent performance in corrosive environments, weathering and exposure to UV radiation. Wide range of accessories with multiple applications. Tray with lid (insulating protective channel) according to EN 50085. Complies with REACH and ROHS III directives. Free of dangerous substances.

## Advantages

Excelente comportamiento en ambientes corrosivos, intemperie y exposición a la radiación UV.

Grado de protección IP 2X y Grado de Impacto 20 J (EN 61537) y IK10 (EN50085)

The perforations in the longitudinal direction assist in the fixing and clamping of the cables.

Material aislante, seguridad eléctrica y reducción de costes en mantenimiento.

No propagador de la llama. Reacción al fuego, grado V0 y clasificación M1

## Applications

## Solutions



| Product data |               |                                |                |
|--------------|---------------|--------------------------------|----------------|
| Colour       | Grey RAL 7035 | Impact Strength (J)            | 6 J            |
| Flange (mm)  | 60            | Section (mm2)                  | 14689          |
| Width (mm)   | 300           | IP                             | IP23           |
| Length (m)   | 3             | Working temperature range (°C) | -20 / 60 °C    |
| kg/u         | 2.413         | Fire resistance                | GRADO UL94: V0 |
| u            | 12            | UV Behaviour                   | ULf1 Resistant |
| Material     | PVC           |                                |                |

| Protection System                 |
|-----------------------------------|
| CU - Copper electroplated         |
| PG - Pregalvanised                |
| EZ - Electrogalvanised            |
| BC - Electrogalvanised Bichromate |
| BK8 - High Resistance Coating     |
| GC - Hot Dip Galvanising          |
| INOX - Stainless Steel            |
| PT - Polyester Paint              |
| AL - Aluminum                     |
| LN - Brass or Nickel-plated brass |

| Insulating materials                      |
|-------------------------------------------|
| PC+ABS - Halogen Free Polycarbonate + ABS |
| PVC - Polyvinyl Chloride                  |
| PP - Halogen Free Polypropylene           |
| PA6 - Halogen Free Polyamide 6            |
| PA12 - Halogen Free Polyamide 12          |
| PU - Polyurethane                         |
| PE - Polyethylene                         |
| NBR - NBR rubber                          |
| PET - Thermoplastic Polyester             |
| TPV - Thermoplastic                       |

## Product applications

