


This specification has been downloaded from ElectrixInternational.com.

UK Q20 | Metric Conduit Terminal Box





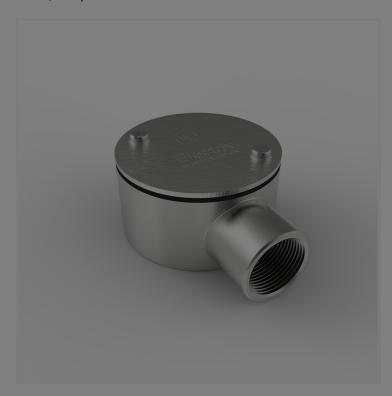

Electrix® Metric Conduit Terminal Boxes, in 316C16F stainless steel with a 316L - V4A - 1.4404 stainless steel lid, can be used to terminate a conduit run, whilst the removable lid provides access for inspection and installation purposes.

The world's first complete Stainless Steel Conduit System, invented by Electrix®, is known for its unrivalled quality and aesthetics.

Since the system was launched over 35 years ago, it has been specified by the world's largest companies, for projects ranging from oil rigs to monuments, tunnels to chemical processing plants.

This IP69K / IP67* terminal box, complete with an internal earth point, is compatible with our 20 mm Metric Conduit System.

Each terminal box is supplied with a lid, gasket, screws & washers.

SPECIFICATIONS		
Material Information		
Material Type	Stainless Steel	
Material Grade	Lid: 316L - V4A - 1.4404 Base: 316C16F	
Cookie Usage By clicking "Accept All Cookies", you	Lid: Satin (Brushed) Base: Electropolished	
agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our		
marketing efforts.	20	
	20	
Accept All Cookies		
Cookies Settings	Metric	
	Metric	
	ISO form 1.5 mm pitch	
Conduit Box Ø (mm)	60.3	

Gasket Material	2 mm Neoprene Rubber
Number of Lid Fixings	2
Ratings & Standards	
Approvals	CERTIFIED CE UK SAFETY US E233497 IP69K IP67
UL Information	File Number: E233497
	Conduit Systems for Cable Management Certified to IEC Standards
Environmental Rating	IP69K / IP67*
Operating Temperature (without Impact)	-25°C to +150°C (-13°F to +302°F) (with Blue Silicone Gasket)
	-15°C to +90°C (+5°F to +194°F) (with Black Neoprene Gasket)
For Use With	
For Conduit Ø (mm)	20
General Information	
Supplied With	Lid, Gasket & Lid Fixings
Ideally Suited For	Offshore, Chemical, Food, Dairy, Brewing, Pharmaceutical, Soft Drinks, Architectural companies & many more
Compatible With	Metric Conduit
Pack Quantity	1
Weight (kg)	0.34
Commodity Code	73071990
Fine Print	*IP rating is only maintained when all apertures are adequately sealed. In order to achieve this IP rating, the use of a suitable thread sealant is required on the final 3x threads of engagement. Earth / ground continuity must be maintained at all times.
Disclaimer	Images are representative of range and for illustration purposes only. Please check the full specifications for more information. All dimensions are subject to tolerances - please refer to the technical drawings.

Stainless Steel Electrical Enclosures, Trunking, Conduit, Wire Basket Tray, Cable Tray, Supports, Strut, Brackets & Fasteners

Head Office Contact Details:

+44 (0) 1388 774455

+44 (0) 1388 777359

info@electrixinternational.com

www.electrixinternational.com

USA/Canada Sales Office:

1-888-774-4550 Toll-Free

or +1 917-717-7445

1-888-774-4990 Toll-Free

wsa@electrixinternational.com

www.electrixinternational.com

Nos Coordonnées:

0800 913132 (N° Gratuit - France) ou 0044 1388 774455

0044 1388 777359

info@electrix.fr

www.electrixinternational.com

Setzen Sie sich mit uns in Verbindung:

0800 1830118 (Deutschland) oder 0044 1388 774455

0044 1388 777359

info@kabelverlegungssysteme.com

www.electrixinternational.com

Registered Office: Electrix International Ltd, Dovecot Hill, South Church Enterprise Park, Bishop Auckland, Co. Durham, DL14 6XP, ENGLAND Electrix International Ltd is a UK registered company with company number 1570249 - VAT No. GB353998012

