


This specification has been downloaded from ElectrixInternational.com.

UK S20 | Metric Conduit Angle Box

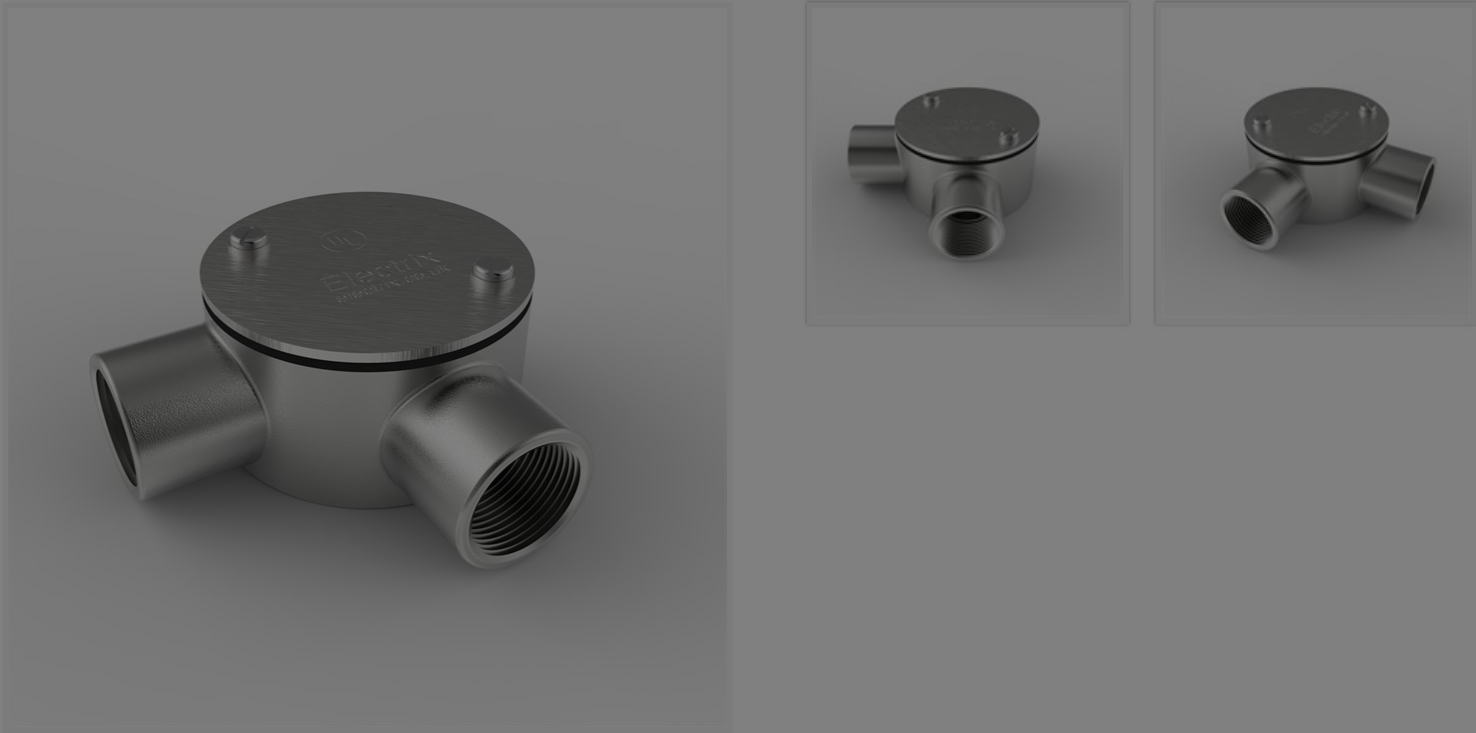

Electrix® Metric Conduit Angle Boxes, in 316C16F stainless steel with a 316L - V4A - 1.4404 stainless steel lid, can be used to change direction during an installation, whilst the removable lid provides access for inspection and installation purposes.

The world's first complete Stainless Steel Conduit System, invented by Electrix®, is known for its unrivalled quality and aesthetics.

Since the system was launched over 35 years ago, it has been specified by the world's largest companies, for projects ranging from oil rigs to monuments, tunnels to chemical processing plants.

This IP69K / IP67* angle box, complete with an internal earth point, is compatible with our 20 mm Metric Conduit System.

Each angle box is supplied with a lid, gasket, screws & washers.






SPECIFICATIONS	
Material Information	
Material Type	Stainless Steel
Material Grade	Lid: 316L - V4A - 1.4404 Base: 316C16F
	Lid: Satin (Brushed) Base: Electropolished
	20
	20
	Metric
	Metric
	ISO form 1.5 mm pitch
Conduit Box Ø (mm)	60.3

Cookie Usage

By clicking “Accept All Cookies”, you agree to the storing of cookies on your device to enhance site navigation, analyze site usage, and assist in our marketing efforts.

Accept All Cookies

Cookies Settings





Gasket Material	2 mm Neoprene Rubber
Number of Lid Fixings	2
Ratings & Standards	
Approvals	    
UL Information	<p>File Number: E233497</p> <p>Conduit Systems for Cable Management Certified to IEC Standards</p>
Environmental Rating	IP69K / IP67*
Operating Temperature (without Impact)	<p>-25°C to +150°C (-13°F to +302°F) (with Blue Silicone Gasket)</p> <p>-15°C to +90°C (+5°F to +194°F) (with Black Neoprene Gasket)</p>
For Use With	
For Conduit Ø (mm)	20
General Information	
Supplied With	Lid, Gasket & Lid Fixings
Ideally Suited For	Offshore, Chemical, Food, Dairy, Brewing, Pharmaceutical, Soft Drinks, Architectural companies & many more
Compatible With	Metric Conduit
Pack Quantity	1
Weight (kg)	0.34
Commodity Code	73071990
Fine Print	<p>*IP rating is only maintained when all apertures are adequately sealed. In order to achieve this IP rating, the use of a suitable thread sealant is required on the final 3x threads of engagement. Earth / ground continuity must be maintained at all times.</p>
Disclaimer	<p>Images are representative of range and for illustration purposes only. Please check the full specifications for more information. All dimensions are subject to tolerances - please refer to the technical drawings.</p>

Stainless Steel Electrical Enclosures, Trunking, Conduit, Wire Basket Tray, Cable Tray, Supports, Strut, Brackets & Fasteners

Head Office Contact Details:

 +44 (0) 1388 774455
 +44 (0) 1388 777359
 info@electrixinternational.com
 www.electrixinternational.com


USA/Canada Sales Office:

 1-888-774-4550 Toll-Free
or +1 917-717-7445
 1-888-774-4990 Toll-Free
 usa@electrixinternational.com
 www.electrixinternational.com

Nos Coordonnées:

 0800 913132 (N° Gratuit - France)
ou 0044 1388 774455
 0044 1388 777359
 info@electrix.fr
 www.electrixinternational.com

Setzen Sie sich mit uns in Verbindung:

 0800 1830118 (Deutschland)
oder 0044 1388 774455
 0044 1388 777359
 info@kabelverlegungssysteme.com
 www.electrixinternational.com

Registered Office: Electrix International Ltd, Dovecot Hill, South Church Enterprise Park, Bishop Auckland, Co. Durham, DL14 6XP, ENGLAND
Electrix International Ltd is a UK registered company with company number 1570249 - VAT No. GB353998012



Certificate Registration No. 438273 QM15
Electrix International Ltd
ISO 9001 : 2015