

MAR2026



United Kingdom

### Scolmore<sup>®</sup>

Scolmore Park, Landsberg, Lichfield Road Industrial Estate, Tamworth, Staffordshire B79 7XB United Kingdom

T: +44 (0)1827 63454 **F:** +44 (0)1827 63362 E: sales@scolmore.com

www.scolmore.com

### Southern Ireland

### **CLICK**<sup>°</sup> Litehouse

18 Corrig Road, Sandyford Industrial Estate, Dublin, D18 WV79, Ireland

**T:** +353 (1) 2811 122 **F:** +353 (1) 2811 224 E: sales@clicklitehouse.ie

www.clicklitehouse.ie

### Scolmore® Dubai



Lake Central Tower, Office 1803, Business Bay, Dubai, UAE

UAE Office: +971 4589 6552 **F:** +971 52 451 1164 E: sales@scolmoredubai.com

www.scolmoredubai.com

Errors and Omissions excluded. Specification is subject to change without notice.

# **CLICK<sup>®</sup> SCOLMORE<sup>®</sup> USB-C SOCKETS**



### Type A & Type C Ports

Supporting both Type A and Type C USB ports. Type C USB is reversible and can be plugged in either upwards or downwards.

### Type A Charging Output: 5V DC, 2.4A Type C Charging Output: 5V DC, 3A

\* When both USB Ports are in use, the 4.2A charge is shared, with the Type C charger given priority to output its full 3A. The Type A output is reduced to an output of 1.2A.





# 25mm Back Box

No additional spacer or mounting frames required. Reduced depth across all ranges.\*

\* Define<sup>®</sup> and Definity<sup>™</sup> require a 35mm Back Box.

### Antimicrobial Certified

All moulded wiring accessories are manufactured using Urea Formaldehyde, which has similar inherent properties to antimicrobial additives that inhibit the growth of infectious diseases. All products independently tested achieved a 99.99% kill off rate across all four types of the strains of bacteria - MRSA, E-Coli, Salmonella and Klebsiella Pneumonia.

MODE<sup>°</sup> *p*⊕*lar*<sup>°</sup> Part M Range<sup>™</sup>



Deco®

With black/white inserts = VP \* 786 \*

With ingot inserts = VP \* 586 \*

DP \* 586 \*

### -0 T. -100

786

Product

No.

BK

Insert

Colour

BK

Insert

Colou

All Deco<sup>®</sup> products are available with black or white inserts, excluding Antique Brass and Black Nickel finishes which are supplied with black inserts and gasket only.



When ordering any Deco<sup>®</sup> products, please specify the required finish by following the simple code structure shown. For Georgian style cast brass, please replace the 'PLATE STYLE' and 'PRODUCT FINISH' with 'GCBR.'



# Deco Plus<sup>®</sup>

BN

Product

Finisł

DP

Plate

FP

**PN** 

Product

Finish

VP

Plate

Style



586

Product

All Deco Plus® products are available with black or white inserts, excluding Antique Brass and Black Nickel finishes which are supplied with black inserts and gasket only.



by following the simple code structure shown.



Define® Θ e

586

Product

All Define® products are available with black or white inserts, except Black Nickel which is supplied with black inserts and gasket only.



When ordering any Define<sup>®</sup> products, please specify the required finish by following the simple code structure shown.



CH

Product

Finish



WH

Insert

Colour







FP \* 586 \*

\* Third party tested and approved to; BS 1363-2: 2016 + A1: 2018, BS EN 62680-1-1: 2015, BS EN 62368-1: 2014, EN 61000-6-1: 2007, EN 61000-6-3: 2007+A1:2011 & GCC Approved.

### Mode®

**CMA786** 





A stylish, contemporary and flexible range of smooth profile wiring accessories.


# Polar™ **PRW786**






A premium range of bright white wiring accessories.

# Definity™

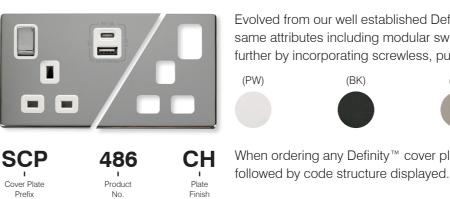

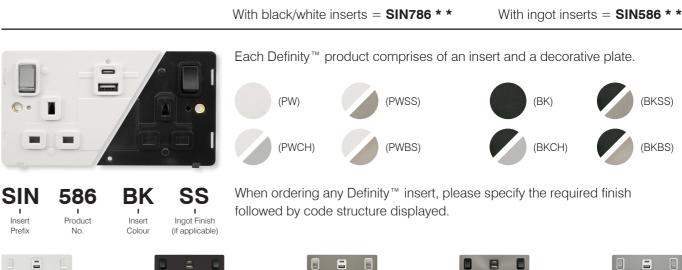

# Metal Clad



Electrophoretically coated plates, durable and long lasting heavy duty finish. Supplied with a 40mm deep back box.

Part M<sup>™</sup>

CMA786AG





Visually contrasting wiring accessories.

### Cover Plate = SCP486 \*\*

Evolved from our well established Define® flat plate and features all of the same attributes including modular switching, but Definity<sup>™</sup> goes one stage further by incorporating screwless, push-fit face plates in 5 assorted finishes.



When ordering any Definity<sup>™</sup> cover plate, please specify the required finish





