





# Indoor SWA Glands

**Application:** Brass indoor gland suitable for all types of steel wire armoured cable (SWA), providing mechanical cable retention and electrical continuity via armour wire termination.

**Operating Temperature:** -80C to +300C

**Ingress Protected:** IP2X

**Standard:** BS 6121 Part 1:2005

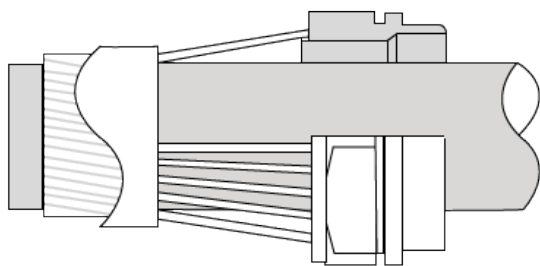

Cable Size (mm)	Number of Cores											
	1	2	3	4	5	7	10	12	19	27	37	48
1.5	-	-	-	BW20S	BW20S	BW20S	BW20	BW20	BW25	BW25	BW32	BW32
2.5	-	BW20S	BW20S	BW20S	BW20S	BW20	BW25	BW25	BW25	BW32	BW32	BW40
4	-	BW20S	BW20S	BW20	BW25	BW25	BW25	BW25	BW32	BW40	-	-
6	-	BW20	BW20	BW20	-	-	-	-	-	-	-	-
10	-	BW20	BW20	BW25	-	-	-	-	-	-	-	-
16	-	BW25	BW25	BW25	-	-	-	-	-	-	-	-
25	-	BW32	BW32	BW32	-	-	-	-	-	-	-	-
35	-	BW32	BW40	BW40	-	-	-	-	-	-	-	-
50	BW20	BW32	BW32	BW32	-	-	-	-	-	-	-	-
70	BW25	BW32	BW40	BW40	-	-	-	-	-	-	-	-
95	BW25	BW40	BW40	BW50	-	-	-	-	-	-	-	-
120	BW25	BW40	BW50	BW50	-	-	-	-	-	-	-	-
150	BW32	BW40	BW50	BW50	-	-	-	-	-	-	-	-
185	BW32	BW50	BW50	BW63	-	-	-	-	-	-	-	-
240	BW40	BW50	BW50	BW63	-	-	-	-	-	-	-	-
300	BW40	BW63	BW63	BW75	-	-	-	-	-	-	-	-
400	BW50	BW63	BW63	BW75	-	-	-	-	-	-	-	-